


HELICAL CENTER DRIVE GEARMOTOR

Durst Helical Center Drive Gearmotors

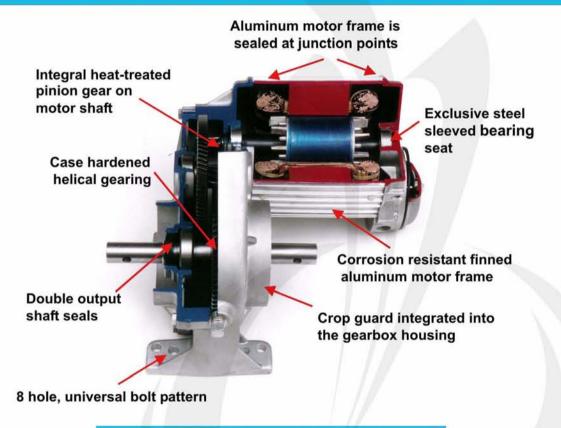

Performance Features

- 460/380 Volt, 3 phase motor, 60/50 Hz
- · Motor is thermally protected with automatic reset
- · Three condensation ports on the motor module
- Motor module interchangeable with Valley[®] unit Gearbox module interchangeable with Valley[®] unit
- · Class F2 insulation
- UL & CSA Certified

- Available in multiple gear ratios 1425 rpm 50:1 (28 rpm) 2850 rpm 25:1 (57 rpm)
- Motors are available in high torque
 .75 hp @ 1750 and 1.5 hp @ 3500 RPM


The leader in Design and Quality you have trusted for over 40 Years.

DURST




Durst Helical Center Drive Gearmotors Dimensional Drawing

Side View

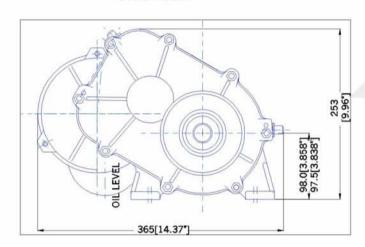

Bottom View (Mount Pattern)



23.80 [0.937"] 2 END Ø25.40 [1.000"] 25.35[.9976"] 2 END Ø9.525[.375"] 9.652[.380"] 2 HOLES 251.00 [9.882"] 397[15.63"]

Available in multiple gear ratios:

1425 rpm 50:1 (28 rpm)

2850 rpm 25:1 (57 rpm)

The leader in Design and Quality you have trusted for over 40 Years.

DURST